

HELIANTHUS : SUNFLOWER ATTACHMENT





HELIANTHUS

FULL FIELD PRODUCTIVITY

The Helianthus front attachment for sunflower harvesting adopts a row-independent harvesting system: this means that its overall dimensions determine the harvesting width without having to worry about row spacing, which can range from 40 cm to 75 cm.


The quality of this platform is guaranteed by a stable, reliable and efficient worldwide brand. HELIANTHUS, an ancient name for an innovative product!




THE REEL IS HEIGHT AND SPEED ADJUSTABLE

The reel is hydraulically height adjustable from the cab of the combine harvester, to constantly conform to the height of the cut based on the different heights and varieties of sunflowers. Reel speed is also hydraulically adjustable from within the cab (optional accessory) using a kit that allows you to conveniently synchronize its speed at will based on the machine's forward speed. The auger's drive is made safe by a torque limiter that stops it being damaged in the event of jamming.

All drive shafts are made from steel alloy and have undergone surface hardening to provide long life and wear resistance. The whole cutting system comprises top-quality components, as does the gearbox transmitting motion to the blade. The divider points are designed to drastically reduce crop losses and are made from wear-resistant steel. Nothing is left to chance, not even the paintwork: all CAPELLO products are coated to the strictest ISO standards in electrostatic powder coating systems and pass the strictest testing.

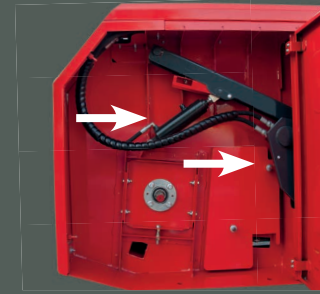


The reel is hydraulically height adjustable and has a hydraulic drive.

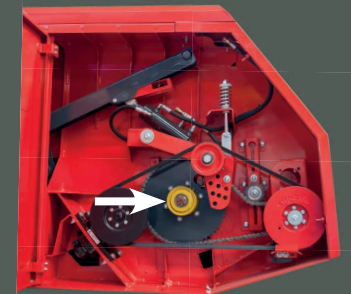

Main driving components are protected with torque limiters.



Position of reel casing is independently adjustable.

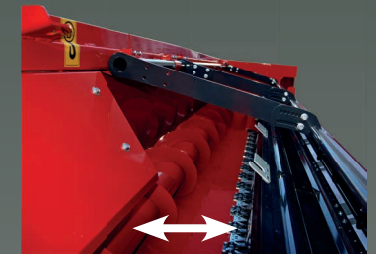

The throughput of the crop can be hydraulically controlled thanks to the height-adjustable reel and the adjustable reel speed.

TECHNICAL DATA



	CUTTING WIDTH [m]	TOTAL WIDTH [m]	WEIGHT [kg]
HELIANTHUS 5700	5,7	6,3	1800
HELIANTHUS 7500	7,5	8,0	2400
HELIANTHUS 9400	9,4	9,9	2800
HELIANTHUS 12000	11,9	12,4	3500

Specifications are not binding and are subject to change without notice.



WHEREVER YOU ARE, WE ARE.



ISO 9001
BUREAU VERITAS
Certification
Certificate No IT258975



CAPELLO SRL • Via Valle Po, 100 • 12100 CUNEO ITALY

Tel. +39 0171 413997 • E-mail: info@capello.it

www.capelloworld.com



ANNIVERSARY
1965-2015